

# 1. 제품 사진

**SOOSUNG**  
TOTAL MOVING SYSTEM









## 2. 제품 제원

제품명	작업대 높이	작업 높이	적재하중	전폭	전장	자중	등판능력
SSL-0507E	4.5M	6.5M	230kg	0.76M	1.46M	1,000kg	25%
SSL-0607H	5.8M	7.8M	230kg	0.81M	1.86M	1,500kg	25%
SSL-0812H	7.9M	9.9M	460kg	1.18M	2.45M	2,400kg	30%
SSL-1012H	9.8M	11.8M	320kg	1.18M	2.45M	2,785kg	25%
SSL-1212H	11.8M	13.8M	320kg	1.18M	2.45M	3,000kg	25%

### 3. 표준 안전 장치



안전바



낙하방지 밸브



Delta Tech 조작판넬 및 비상정지 버튼 (하부)



레벨센서



비상하강 밸브 (하부)



각도센서





출입문



브레이크 수동 해제



안전 풋 스위치



측면 알림 (부저)



압력센서




스테빌라이저


## 4. 성능 향상



Curtis 컨트롤러

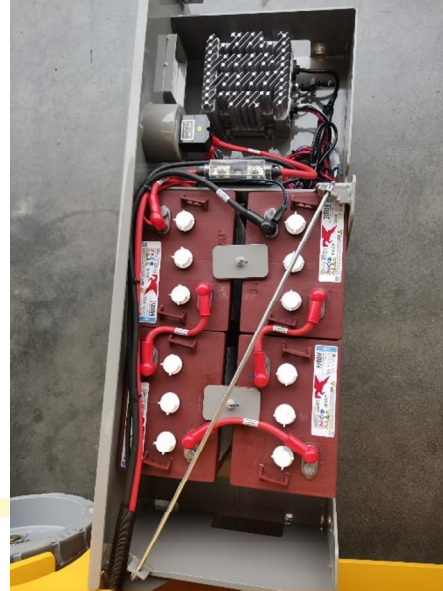

Trojan 배터리

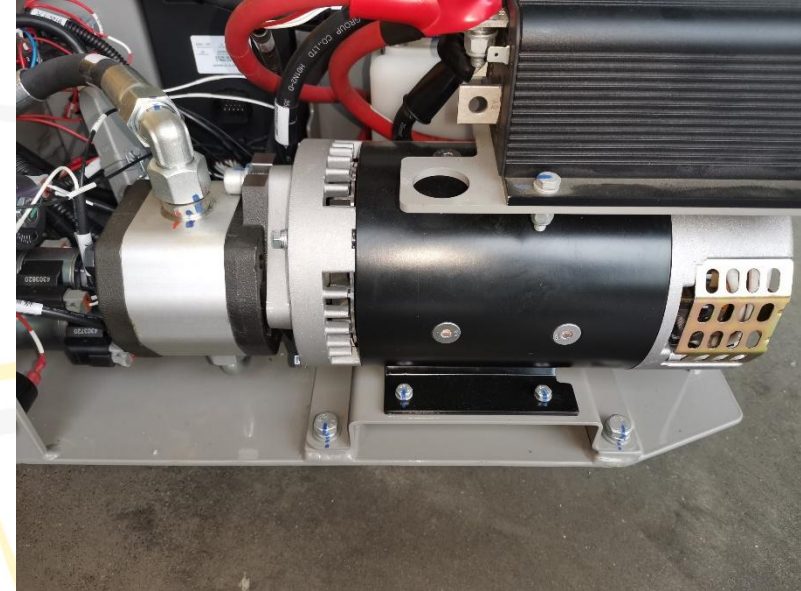

고효율 모터 및 펌프



내장형 충전기



솔리드 타이어





유압 브레이크



Danfoss 휠모터



Delta Tech 일체형 조이스틱



## 5. 편의 사양



상부 AC 콘센트



연장 작업대



접이식 난간대



연장 작업대 스톱퍼

SOOSUNG